


**NEW!**

# Low Profile Chip Inductors 0402CT(1005)




- Maximum height reduced to 0.45 mm – 30% lower profile than competitive products
- 23 inductance values from 1.2 to 56 nH
- Excellent Q Factor performance – up to 83 at 2.4 GHz
- Very high self-resonant frequencies – as high as 27.5 GHz
- High current handling capability – up to 2.3 A

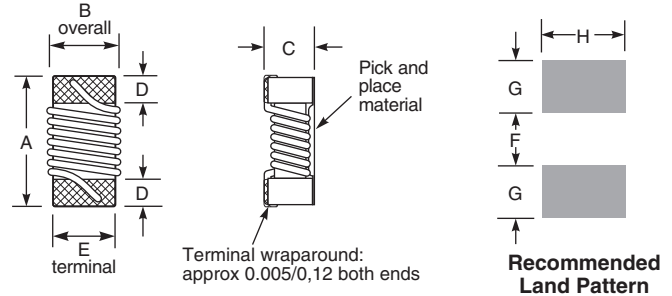


A max	B max	C max	D	E	F	G	H
0.044	0.024	0.018	0.006	0.020	0.024	0.014	0.026
1,11	0,61	0,45	0,15	0,51	0,61	0,36	0,66

## Typical L vs Frequency

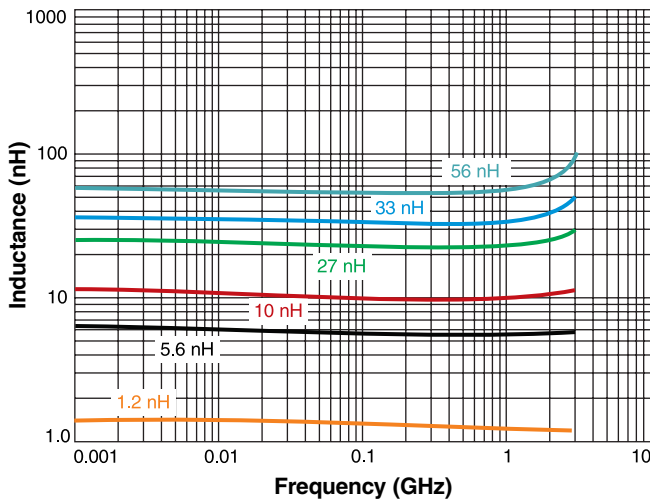

## Typical Q vs Frequency

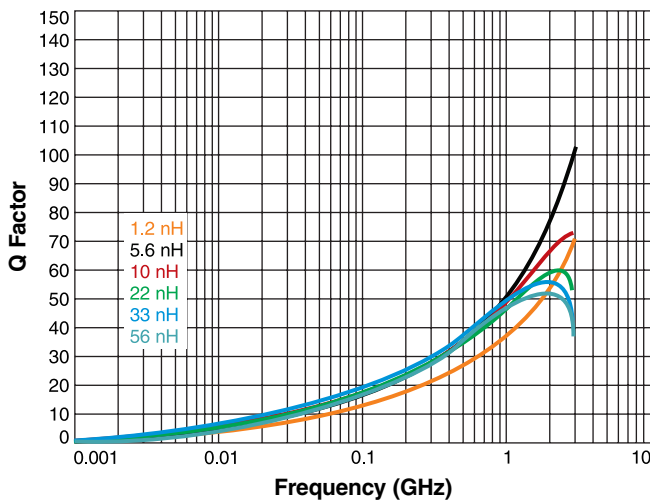

**Core material** Ceramic

**Environmental** RoHS compliant, halogen free

**Terminations** RoHS compliant matte tin over nickel over silver-platinum-glass frit.

**Weight** 0.6 – 0.8 mg

**Ambient temperature** –40°C to +125°C with Irms current

**Maximum part temperature** +140°C (ambient + temp rise).

**Storage temperature** Component: –40°C to +140°C.  
Tape and reel packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Temperature Coefficient of Inductance (TCL)** +25 to +125 ppm/°C

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**  
One per billion hours / one billion hours, calculated per Telcordia SR-332

**Packaging** 2000/7" reel; Paper tape: 8 mm wide, 0.6 mm thick, 2 mm pocket spacing

**PCB washing** Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787\\_PCB\\_Washing.pdf](#).



1/49 Industrial Circuit,  
Cranbourne West VIC 3977 Australia  
+61 39789 2479

SALES: [sales@tricomponents.com.au](mailto:sales@tricomponents.com.au)  
TECH SUPPORT: [tech@tricomponents.com.au](mailto:tech@tricomponents.com.au)  
GENERAL ENQUIRIES: [tricom@tricomponents.com.au](mailto:tricom@tricomponents.com.au)

Document 1460-1 Revised 11/01/19

© Coilcraft Inc. 2019  
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.



# 0402CT Series (1005)



Part number <sup>1</sup>	L <sup>2</sup> (nH)	Percent tolerance <sup>3</sup>	Q typ <sup>4</sup>			SRF typ <sup>5</sup> (GHz)	DCR max <sup>6</sup> (mOhms)	Irms (mA)		
			900 MHz	1.7 GHz	2.4 GHz			at 25°C <sup>7</sup>	at 85°C <sup>8</sup>	at 125°C <sup>9</sup>
0402CT-1N2XJRW	1.2	<b>5</b>	33	47	58	27.5	35	2300	1300	1100
0402CT-2N0X_RW	2.0	<b>5,3,2</b>	40	56	70	21.5	40	2200	1300	1100
0402CT-3N0X_RW	3.0	<b>5,3,2</b>	40	60	76	17.5	50	1900	1300	1000
0402CT-3N9X_RW	3.9	<b>5,3,2</b>	46	66	83	13.5	70	1600	890	720
0402CT-4N7X_RW	4.7	<b>5,3,2</b>	42	59	73	12.5	60	1700	1300	900
0402CT-5N6X_RW	5.6	<b>5,3,2</b>	47	68	83	11.0	80	1400	890	720
0402CT-6N8X_RW	6.8	<b>5,3,2</b>	48	68	82	9.50	70	1600	1300	820
0402CT-7N5X_RW	7.5	<b>5,3,2</b>	47	66	81	10.5	80	1500	1300	760
0402CT-8N2X_RW	8.2	<b>5,3,2</b>	49	68	84	9.50	80	1500	1300	760
0402CT-9N0X_RW	9.0	<b>5,3,2</b>	50	68	82	8.35	100	1300	1100	680
0402CT-9N5X_RW	9.5	<b>5,3,2</b>	47	64	77	7.80	100	1300	1100	680
0402CT-10NX_RW	10	<b>5,3,2</b>	46	61	70	7.25	110	1200	890	630
0402CT-12NX_RW	12	<b>5,3,2</b>	45	60	68	6.75	135	1100	890	590
0402CT-15NX_RW	15	<b>5,3,2</b>	48	63	69	6.50	150	1100	890	560
0402CT-16NX_RW	16	<b>5,3,2</b>	44	58	65	6.35	165	1000	890	530
0402CT-18NX_RW	18	<b>5,3,2</b>	45	59	64	5.90	240	1000	890	530
0402CT-20NX_RW	20	<b>5,3,2</b>	45	57	61	5.70	300	900	760	470
0402CT-22NX_RW	22	<b>5,3,2</b>	44	56	60	5.25	260	810	640	420
0402CT-27NX_RW	27	<b>5,3,2</b>	45	55	58	4.85	360	660	550	350
0402CT-33NX_RW	33	<b>5,3,2</b>	46	56	53	4.60	400	610	550	320
0402CT-39NX_RW	39	<b>5,3,2</b>	49	58	—	4.25	825	430	320	180
0402CT-47NX_RW	47	<b>5,3,2</b>	43	49	—	3.90	900	400	320	180
0402CT-56NX_RW	56	<b>5,3,2</b>	45	53	—	3.70	1250	340	260	140

1. When ordering, specify **tolerance** code:

**0402CT-56NXJRW**

**Tolerance:** G = 2% H = 3% J = 5%

**Termination:** R = RoHS compliant matte tin over nickel over silver-platinum-glass frit.

**Packaging:** W = 7" machine-ready reel. EIA-481 punched paper tape (2000 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

2. Inductance measured at 250 MHz, 0.1 Vrms, 0 Adc using Coilcraft SMD-A fixture in Agilent/HP 4287A impedance analyzer.  
 3. Tolerances in bold are stocked for immediate shipment.  
 4. Q measured using Agilent/HP4991A with Agilent/HP 16197 test fixture.

5. SRF measured using Agilent/HP 8722ES network analyzer and Coilcraft SMD-D test fixture.  
 6. DCR measured on Cambridge Technology micro-ohmmeter and Coilcraft CCF858 test fixture.  
 7. Current that causes a 40°C temperature rise at 25°C ambient. This information is for reference only and does not represent absolute maximum ratings.  
 8. Maximum current that can be applied at 85°C.  
 9. Maximum current that can be applied at 125°C.  
 10. Electrical specifications at 25°C.  
 Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



1/49 Industrial Circuit,  
 Cranbourne West VIC 3977 Australia  
 +61 39789 2479

SALES: sales@tricomponents.com.au  
 TECH SUPPORT: tech@tricomponents.com.au  
 GENERAL ENQUIRIES: tricom@tricomponents.com.au

Document 1460-2 Revised 11/01/19

© Coilcraft Inc. 2019  
 This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.