

NEW!

Low Profile Chip Inductors 0402FL (1005)



- Developed for use in cellular applications:
 - As a filter element in bandstop and low pass filters
 - As a one pole filter or RF choke in cellular bands
- Can also be used for ground-to-ground isolation
- Equally effective on-board or modular
- Maximum height reduced to 0.55 mm – 10% lower profile than competitive products
- Ferrite construction for high current handling
- Ideal for use in both mobile and infrastructure equipment

Part number ¹	Inductance ² ±5% (nH)	Impedance typ (Ohms)		SRF typ ³ (MHz)	DCR max ⁴ (Ohms)	Irms (mA)		
		900 MHz	1.7 GHz			at 25°C ⁵	at 85°C ⁶	at 125°C ⁷
0402FL-200XJR_	20	95	170	2950	0.065	1300	900	680
0402FL-360XJR_	36	185	365	2250	0.085	1050	900	550
0402FL-560XJR_	56	285	610	1900	0.110	900	820	470
0402FL-770XJR_	77	380	825	1800	0.125	850	770	440
0402FL-101XJR_	100	525	1240	1575	0.145	820	750	430
0402FL-121XJR_	120	650	1450	1950	0.165	810	740	420
0402FL-151XJR_	150	770	1600	1300	0.180	730	670	380
0402FL-161XJR_	160	900	2000	1850	0.235	630	580	330
0402FL-181XJR_	180	990	2050	1800	0.200	690	630	360
0402FL-221XJR_	220	1280	3300	1120	0.290	580	530	300
0402FL-271XJR_	270	1825	3625	975	0.300	560	510	290
0402FL-331XJR_	330	2330	3100	875	0.475	400	370	210
0402FL-391XJR_	390	3150	3115	820	0.560	360	330	190
0402FL-421XJR_	420	3325	3540	800	0.570	360	330	190
0402FL-471XJR_	470	4460	3160	750	0.800	330	300	170
0402FL-561XJR_	560	5025	3150	700	0.970	290	260	150

1. When ordering, please specify **packaging** code:

0402FL-181XJRW

Termination: R = RoHS compliant matte tin over nickel over silver-platinum-glass frit.

Packaging: W = 7" machine-ready reel. EIA-481 punched paper tape (2000 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

Y = 7" machine-ready reel. EIA-481 punched paper tape (10000 parts per full reel). Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge)

- Inductance measured at 7.9 MHz using a Coilcraft SMD-F test fixture and Coilcraft-provided correlation pieces with an Agilent/HP 4286 impedance analyzer.
 - SRF measured using Agilent/HP 8753D network analyzer and Coilcraft SMD-D test fixture.
 - DCR measured on Cambridge Technology micro-ohmmeter and a Coilcraft CCF858 test fixture.
 - Current that cause 40°C rise at 25°C.
 - Maximum current that can be applied at 85°C.
 - Maximum current that can be applied at 125°C.
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

Core material Ferrite

Environmental RoHS compliant without exemption, halogen free

Terminations RoHS compliant matte tin over nickel over silver-platinum-glass frit.

Weight 0.9 – 1.1 mg

Ambient temperature –40°C to +125°C with Irms current

Maximum part temperature +140°

Storage temperature Component: –40°C to +140°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Temperature Coefficient of Inductance (TCL) +25 to +150 ppm/°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

One per billion hours / one billion hours, calculated per Telcordia SR-332

Packaging 2000 per 7" reel or 10000 per 7" reel. Paper tape: 8 mm wide, 0.68 mm thick, 4 mm pocket spacing

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).



1/49 Industrial Circuit,
Cranbourne West VIC 3977 Australia
+61 39789 2479

SALES: sales@tricomponents.com.au
TECH SUPPORT: tech@tricomponents.com.au
GENERAL ENQUIRIES: tricom@tricomponents.com.au

Document 1423-1 01/18/19


© Coilcraft Inc. 2019

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.





Chip Inductors – 0402FL Series

Typical L vs Frequency

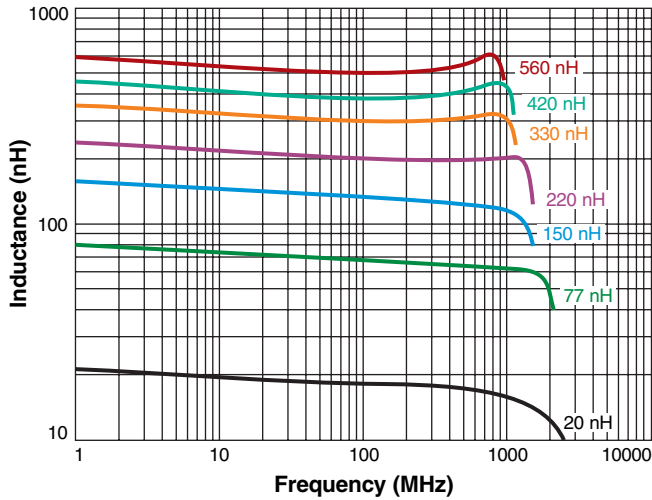

Typical Z vs Frequency

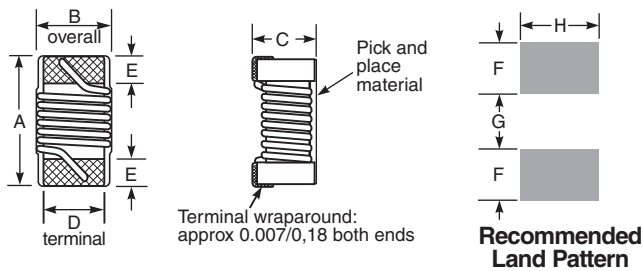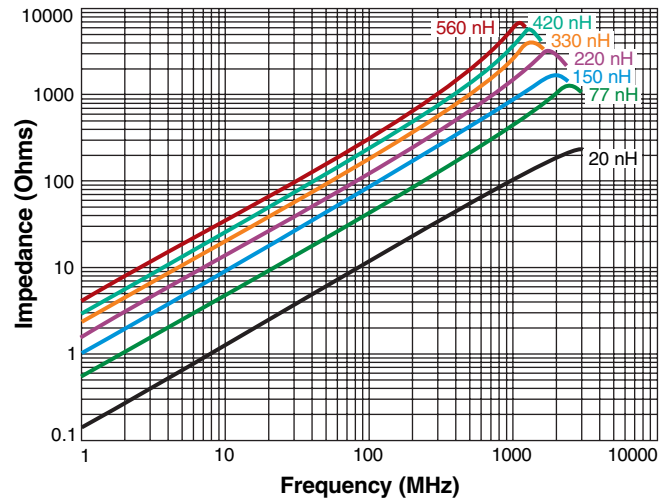

Amax	Bmax	Cmax	D	E	F	G	H	
0.044	0.028	0.022	0.022	0.007	0.014	0.025	0.026	inches
1,11	0,72	0,55	0,55	0,18	0,36	0,635	0,66	mm



1/49 Industrial Circuit,
Cranbourne West VIC 3977 Australia
+61 39789 2479

SALES: sales@tricomponents.com.au
TECH SUPPORT: tech@tricomponents.com.au
GENERAL ENQUIRIES: tricom@tricomponents.com.au

Document 1423-2 01/18/19

© Coilcraft Inc. 2019
This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.